

07-24-00

A

07/21/00

jc821 U.S. PTO

PATENT APPLICATION  
Docket No.: 27795-00018  
P17422USAU

jc784 U.S. PTO

09/621032

07/21/00

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Leslie Gary GRAF et al.

For: A SYSTEM AND METHOD OF COMMUNICATING OPERATING CAPABILITIES IN A  
TELECOMMUNICATION NETWORK

## CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL524962259US

Date of Deposit: July 21, 2000  
I hereby certify that the paper(s) and/or fee(s) listed  
below are attached hereto and are being deposited with  
the U.S. Postal Service "Express Mail Post Office to  
Addressee" service under 37 CFR 1.10 on the date  
indicated above and is addressed to the Assistant  
Commissioner of Patents, Washington, D.C. 20231

Type or Print Name: Carol A. Woods  
Signature: Carol A. Woods

BOX PATENT APPLICATION  
Assistant Commissioner of Patents  
Washington, D.C. 20231

Sir:

## PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

1. (XX) The specification of the above-referenced patent application is enclosed herewith (20 page(s) including claim(s) and Abstract).
2. (XX) Four (4) sheet(s) of:
  - informal drawing(s) is (are) enclosed herewith.
  - X formal drawing(s) is (are) enclosed herewith.

3. (X ) The fees for this application have been calculated and included as shown below (Prior to calculating the fees, please enter any enclosed preliminary amendment.):

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$690
TOTAL CLAIMS	45-20	25	\$18	450
INDEPENDENT CLAIMS	4-3	1	\$78	78
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$260	260
TOTAL FEES:				\$1,478
Deduct One-Half for Small Entity Status				
Assignment Recordal Fee			\$40	
TOTAL AMOUNT DUE:				\$1,478

4. X Check(s) in the amount of \$ 1,478.00 is/are enclosed herewith. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

\_\_\_\_ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_. Please charge any deficiency or credit any overpayment to Deposit Account No. \_\_\_\_\_.

5. (X ) An oath or declaration is enclosed herewith that is:

X Unsigned

\_\_\_\_ Newly executed per 37 CFR 1.63(a) and (b).

\_\_\_\_ A copy of the executed declaration filed in the prior application upon which priority is based, showing the signature or an indication thereon that it was signed; and:

\_\_\_\_ This application is being filed fewer than all of the inventors named in the prior application and it is requested that the following name or names be deleted from the list of inventors in the prior application for this continuation or divisional application:

\_\_\_\_ The prior application was accorded status under 37 CFR § 1.47 and is accompanied by:

- ☐ A copy of the decision granting a petition to accord Sec. 1.47 status to the prior application (unless all of the inventors have or legal representatives have filed an oath or declaration to join in the prior application).
- ☐ A copy of the subsequently executed oath(s) or declaration(s) filed by the inventor(s) or legal representative(s) that have subsequently joined in the prior application.

6. (X ) The power of attorney for this application:
- ☐ is appointed in the newly executed Oath or Declaration submitted herewith.
  - ☒ is appointed by the power of attorney enclosed herewith.
  - ☐ remains the same as originally in the parent application.
  - ☐ was changed during the prosecution of the parent application and a copy of the change in the power of attorney is enclosed herewith.

7. (XX) The correspondence address for this application shall be:
- Stanley R. Moore, Esq.  
Jenkins and Gilchrist, P.C.  
3200 Fountain Place  
1445 Ross Ave.  
Dallas, Texas 75202
- ☒ which is a new correspondence address or a change therein.
  - ☐ which is the same as originally in the parent application.
  - ☐ which is the change in the correspondence address that was filed during the prosecution of the parent application.

8. (X ) Priority is hereby claimed under 35 USC 119 and 172 to the following foreign applications:

Country	Serial No.	Date
<u>Australia</u>	<u>PQ1783</u>	<u>22 July 1999</u>
<u>Australia</u>	<u>PQ1942</u>	<u>30 July 1999</u>

and:

- ☐ A certified copy of each application is enclosed herewith.
- ☐ A certified copy of each application was filed in prior application Serial No. \_\_\_\_\_.

9. ( ) A verified statement claiming small entity status under 37 CFR 1.9 and 1.27:
- ☐ is enclosed herewith.
  - ☐ was filed in parent application Serial No. \_\_\_\_\_, and such status remains unchanged and is requested for this application.

10. ( ) A preliminary amendment is enclosed herewith.

11. ( ) An Information Disclosure Statement with Modified PTO Form 1449 and a copy of the cited references are enclosed herewith.
12. ( ) An Assignment of the invention to TELEFONAKTIEBOLAGET LM ERICSSON (publ) with cover sheet and recordation fee is enclosed herewith for recordation by the Assignment Branch.
13. (XX) The Commissioner is hereby authorized to charge payment, or to credit any overpayment, of the following fees associated with this filing or during the pendency of this application to Deposit Account No. 10-0447.
- X Any patent application filing fees under 37 CFR 1.16.
- X Any patent application processing fees under 37 CFR 1.17.
- The issue fee under 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
14. ( ) Other (specify): \_\_\_\_\_
15. (XX) Confirmation Postcard.

Respectfully submitted,

  
Stanley R. Moore  
Reg. No. 26,958

Jenkins & Gilchrist, P.C.  
3200 Fountain Place  
1445 Ross Avenue  
Dallas, Texas 75202-2799  
214/855-4713  
214/855-4300 (Fax)

A SYSTEM AND METHOD OF COMMUNICATING OPERATING CAPABILITIES  
IN A TELECOMMUNICATION NETWORK

FIELD OF INVENTION

In general, the present invention relates to a system and method of  
5 communicating operating capabilities in a telecommunication network or networks

In one aspect, the present invention relates to a method of negotiating  
operating capabilities between telecommunication subscribers, and more  
particularly relates to a method of enabling codec compatibility between a first  
mobile station in a public land mobile network (PLMN) and a network node either  
10 located in a fixed network or in a different PLMN or in the same PLMN, although,  
it is to be appreciated, however, that the invention is not limited to use in that  
application, only.

In another aspect, this invention relates to a method of providing operating  
capabilities at a telecommunications network node, and more particularly relates  
15 to a method of providing operating capabilities at a telecommunications network  
node during a call set-up procedure between a mobile station in a mobile  
telecommunications network and a network element.

BACKGROUND OF INVENTION

In general, when a subscriber having a mobile station (MS) or terminal  
20 located within a first PLMN wishes to contact another subscriber having a mobile  
station or terminal located in a different PLMN, the first mentioned subscriber's  
MS must transmit to its serving mobile switching centre (MSC) operating  
capabilities, such as, a codec or a list of codecs on which it can transmit  
information or messages. Negotiation must then be initiated, typically, over a  
25 fixed switched network, such as PSTN, or ISDN, IP or ATM with the other mobile  
station or terminal. Once operating capabilities are negotiated between the two  
mobile stations then the call may proceed using those capabilities. All of this  
negotiation requires a lot of signalling to take part between the originating mobile  
station and its serving MSC each time a call needs to be established.

30 As mobile networks are becoming more and more advanced and requiring  
the transmission of greater amounts of data between nodes of the network or  
across other networks such as a PSTN or ISDN fixed network, this creates a

burdensome task for nodes within the network to process all the data. Furthermore, the signalling process takes place relatively slowly. It would therefore be desirable to remove extra data, where possible, especially between an MS and its serving MSC, in order to increase the speed of signalling and  
 5 reduce the signalling load between the MS and MSC, especially for example, at call set-up. By reducing the amount of signalling data that needs to be transmitted between an originating mobile station and its serving MSC, the network resources could be more efficiently used.

In one particular arrangement, developed by the present applicant, a  
 10 Bearer Independent Call Control (BICC) protocol is used for negotiating operating capabilities, and in particular codec negotiation. The BICC protocol is particularly suitable for third generation mobile networks, such as UMTS, wherein non-TDM transport technologies are used. However, the proposed BICC codec negotiation is not fully optimised for mobile environments. In particular, it is not optimised for  
 15 fast selection of operating capabilities for mobile terminated calls when, for efficiency reasons, transcoders are placed in the edge of the core network at the GMSC.

The present invention seeks to overcome or substantially ameliorate at least one of the disadvantages of the prior art.

## 20 SUMMARY OF INVENTION

In one aspect the present invention provides a method of communicating in a telecommunication system including at least one mobile station, the method including the step of providing operating capabilities of the mobile station at a node associated with the mobile station wherein the node is upstream in a  
 25 communication path from the mobile station.

In another aspect the present invention provides a telecommunication system including at least one mobile station and at least one node associated with the mobile station, the node including storage means for providing operating capabilities of the mobile station wherein the node is upstream in a  
 30 communication path from the mobile station.

In essence, the present invention stems from the realisation that mobile telecommunication network resources can be utilised with greater efficiency by

maintaining mobile station attributes or operating capabilities at a network node associated with the mobile station. Preferably, the network node is a Visitor Location Register VLR. Additionally, the network node may be a Home Location Register HLR, a Mobile Switching Centre MSC or a Gateway Mobile Switching Centre GMSC. In particular, the invention may provide the creation of a list of operating capabilities at a network node upstream from the mobile station. Having done this, a comparison of this list with another list received from a remote telecommunication element to negotiate operating capabilities at a call set up is achieved without involving communication resources between the mobile station and the network node.

In a further aspect, the present invention seeks to overcome or substantially ameliorate any of the abovementioned disadvantages by providing a method of negotiating operating capabilities between a mobile station and a network node whereby the amount of signalling required between the originating mobile station and its serving MSC is reduced.

Accordingly, in this aspect, the present invention provides a method of negotiating operating capabilities between a mobile station in a mobile telecommunications network and a network node, wherein said mobile telecommunications network includes a storage means associated with a switching centre serving said mobile station;

the method including the step of:

transmitting a list of one or more operating capabilities from said mobile station to the switching centre for storage in said storage means as part of a non-call based signal.

The method may further include the step of updating said storage means with another list of operating capabilities, such as codecs, for use by said mobile station when said mobile station moves from one location area to another location area by sending a message to said switching centre for subsequent storage in the storage means. The message may be a location update message or any existing or new message.

The network node may be located in a fixed network, such as PSTN or ISDN or in a mobile network, or it may be a mobile station located in another mobile telecommunications network.

5 The one or more operating capabilities may be prioritised such that a list of preferred operating capabilities is supplied by the mobile station. Operating capabilities may include security algorithms, or codecs, in which case the storage means will receive the list of algorithms supported by the MS for subsequent storage.

10 Thus, the signalling load is reduced between the MS and MSC at call set-up as the operating capabilities of the MS are already stored in the storage means associated with the switching centre and the MS does not need to transmit the operating capabilities each time it needs to establish a call. Furthermore, the MS does not need to receive the list of operating capabilities in the set-up message from the switching centre every time it receives a call.

15 In yet another aspect, the present invention seeks to overcome or substantially ameliorate any of the abovementioned disadvantages by providing a method of making available the list of operating capabilities to be used between a mobile station and a network node during a call set-up procedure between the mobile station and the network node. Accordingly, in this aspect, the present invention provides a method of providing operating capabilities of a mobile station  
20 at a telecommunications network node to a telecommunications element during a call set-up procedure between the mobile station and said telecommunications element, and wherein said telecommunications element transmits to the telecommunications network node a list of operating capabilities of the telecommunications element as part of the call set-up procedure, the method  
25 including the steps of:

transmitting a list of operating capabilities of said mobile station from a switching centre serving said mobile station to said telecommunication network node;

30 providing said list of operating capabilities at said telecommunications network node;



such that on initiation of a communication from said network element to said mobile station, said telecommunications network node internally selects one or more operating capabilities common to both the mobile station and the network element.

- 5 In this manner, the invention advantageously accelerates the selection of operating capabilities for mobile terminated calls wherein negotiation on the operating capabilities to be used between the mobile station and network node is no longer required at call set-up.

- The network element is preferably another mobile station, but may  
10 alternatively be a telecommunications terminal device or node. The list of operating capabilities of the mobile station may be transmitted to the network node in response to an information retrieval message sent from the network node to the switching centre. The list of operating capabilities of said mobile station may have been previously stored in a storage means, such as a VLR, associated  
15 with the switching centre serving the mobile station. The telecommunications network node may be a node located in the same telecommunications network or PLMN as the mobile station. The telecommunications network node may be a node located in a fixed network which is traversed in establishing a call between the network element and the mobile station. Alternatively the telecommunications  
20 network node may be a node of a different network to that where the mobile station is located and is preferably at the home network of the mobile station. The node, when located in one of the PLMNs is preferably a GMSC. The list of operating capabilities of both the network element and the mobile station may be prioritised in the sense that preferred operating capabilities, such as codecs, are  
25 specified.

- A list of operating capabilities of the network element may be stored at a network node serving the network of said network element. Preferably during the call set up the list of operating capabilities of the network element is transmitted from the network node serving the network of the network element to the  
30 telecommunications network node.

Thus, the selection of operating capabilities to be used is accelerated between the mobile station and the network element by the prior storage of the

list of operating capabilities in the telecommunications network node. Codec operating capability negotiation need not take place as part of the call set-up between the mobile station and network element as the particular operating capabilities, such as codecs to be used, can be automatically selected by the telecommunications network node.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

A preferred embodiment of the invention will be hereinafter described, by way of example only, with reference to the drawings wherein:

Figure 1 is a schematic diagram of a telecommunication system used in accordance with the present invention;

Figure 2 is a signalling diagram showing the signalling messages that are conducted between two mobile stations in the telecommunications system of Figure 1 in accordance with a first embodiment of the present invention.

Figure 3 is a signalling diagram showing signalling messages that are passed between an originating mobile station and a destination mobile station using the telecommunications system of Figure 1 in accordance with a second embodiment of the present invention;

Figure 4 is a signalling diagram of the second embodiment of the present invention, showing the messages signalled between a switching centre serving a destination mobile station and a telecommunications network node, being in this case a GMSC located in a home network of the destination mobile station.

In general the present invention provides operating capabilities of a mobile station at a network node capable of storing the operating capabilities and thereafter negotiation of operating capabilities can proceed with a remote telecommunication element where negotiation does not need to take place between the mobile station and the node, which is upstream of the mobile station. When negotiating operating capabilities, a stored list is compared with the operating capabilities of the remote element, which can also be provided prior to a call set up and stored at a node upstream from the remote element. Preferably in the negotiation of operating capabilities, a selection is made based on operating capabilities common to both lists of operating capabilities stored at

each node. Preferably, the remote telecommunication element is another mobile station, a terminal device or a node.

#### FIRST EMBODIMENT

In Figure 1 there is shown a first mobile station MS 4 in a location area 6 (LA1), of a first PLMN 2, which is controlled by base station controller 8. The mobile switching centre 10 is in communication with each of the BSC 8 and a further BSC 9. The MSC 10 has an associated storage means in the form of a visitor location register (VLR) 12 in which is stored details of mobile subscribers and their mobile units that are temporarily located within its serving area, in this case LA1 and LA2. A gateway MSC (GMSC) 14 provides an interface between other networks such as a PSTN or ISDN 16. A further storage means 18 in the form of a home location register (HLR) provides permanent storage of subscriber details and keeps continuous track of the location of a subscriber whether that subscriber is in a MSC service area or in a different PLMN. This information is used by the GMSC 14 when receiving a call from another network. The PLMN 2 also has other MSCs such as MSC 20 with its own VLR 22 and whereby the MSC 20 serves BSCs 24 and 26.

When MS 4 wishes to contact a further mobile station 28 located in another PLMN 30 a set-up message will be transmitted from MS 4 to its serving MSC 10. Thereafter negotiation of operating capabilities, such as codecs or security algorithms, takes place between the MSC 10 and the PLMN 30 and in particular an MSC 29 that is serving between MS 28. An initial address message (IAM) is used to signal between the MSC 10 and MSC 29 of PLMN 30. The negotiation continues to take place and when an operating capability has been agreed upon between the MS 28 and MS 4 to transmit the data, then such data can be transmitted.

The MSC 10 or equivalently a Bearer Independent Call Control (BICC) node has the capability to separate the ISUP signal into a Call Control (CC) portion and a Bearer Control (BC) portion where the call control portion of ISUP carries the initial address message (IAM).

According to the present invention MS 4 regularly transmits to its serving MSC 10, via a message, such as a location update message or any other existing

or new message, a list of operating capabilities\_applicable to MS 4 which is subsequently stored in the VLR 12 associated with that MSC. The list of operating capabilities may be updated at predetermined times for example on polling by the serving MSC 10 or when the mobile station 4 for example changes its location area say from LA1 to LA2. Alternatively a special procedure may be set up between the MS 4 and the MSC 10/VLR 12 to update the capabilities. The updated list of operating capabilities is then subsequently stored in the VLR 12 associated with MSC 10. By doing this, negotiation is handled between the MSC 10 and the MSC 29 as to which is a compatible operating capability on which both mobile stations 28 and 4 can communicate. The controlling MSCs of MS 4 and MS 28 know the operating capability options that each MS can support and the MSCs handle the negotiation on behalf of the MSs. Equivalently, the MS 28 has a list of operating capabilities stored in VLR 31 which it can use. In so doing, this creates less signalling at call set-up for example between the MS 4 and the MSC 10 and between the MS 28 and MSC 29. In practice when a MS 4 requires to initiate a call the MSC 10 will automatically select an operating capability from the list of operating capabilities stored in the VLR 12 and then the subsequent negotiation takes place between the MSC 10 and the MSC 29. The updated list of operating capabilities may be in order of priority so that if the most preferred operating capability cannot be negotiated then the next most preferred operating capability is attempted for compatibility.

The IAM originating from the serving MSC 10 of MS 4, includes the list of operating capabilities that the originating MS 4 prefers to use and once an operating capability is agreed by the BICC node 29 serving the receiving or destination MS 28, then the receiving MS 28 will answer by node 29 confirming a selected operating capability to use.

If the MS 4 crosses over into a further location area LA3 then the VLR 22 associated with the MSC 20 which oversees BSC 24 which in turn oversees LA3 will be updated with the new temporary records of MS 4 as well as HLR 18. Consequently any negotiation that is to take place on initiation from a call from a mobile station 4 while it is in the location area LA3 is done through the VLR 22

and the VLR 31 of the terminating subscriber as the new VLR 22 will have the updated list of operating capabilities.

An example of signalling that takes place between mobile stations during call set-up is shown in Figure 2. MS 4 in PLMN 2 initiates a call set-up\_message at 40. This is received at the serving MSC 10 wherein an Initial Address Message (IAM) is transmitted by way of example over the core network 16 to the MSC 29 serving the terminating subscriber's MS 28. Signalling of the IAM is shown at 42. The IAM contains a list of operating capabilities, which may be prioritised, on which the MS 4 can transmit. The set-up message 44 is used for signalling between the MSC 29 of the terminating subscriber and MS 28. MS 28 then, through its serving MSC 29, responds by MSC 29 negotiating or providing a list of operating capabilities on which MS 28 can transmit to the MSC 10 at step 46. An update may be transmitted at various times or instances from MS 28 to VLR 31 at 45. Negotiation then takes place at 47 between the MSC 10 and the MSC 29. Once agreement is reached on which operating capability is to be used between the mobile stations 4 and 28, at 48, a ringing signal is initiated and an alert message is sent at 50 and then the MSC 29 serving MS 28 sends an address complete message at 52 to the MSC 10. The MSC 29 also sends a call progress message at 56 in response to receiving the alert message. On receipt of this message, an ALERT message is sent at 54 to MS 4 which responds by generating a ringing tone.

If the subscriber of MS 28 answers, that terminal sends a connect message at 58 which in turn is acknowledged by its serving MSC which forwards on an answer message at 60 to the MSC 10 which in turn sends a connect message 62 to MS 4. Conversation can then take place between the two mobile subscribers at 64.

It is to be understood that, although this embodiment has been described in relation to a GSM network, the invention equally applies to third generation PLMN networks and other second generation PLMNs including PDC, D-AMPS, UMTS, CDMAOne and CDMA2000, having similar architectures. In the 3G networks negotiations with respect to operating capabilities, such as codecs may be done by nodes in the core networks such as a public switched network.

Furthermore, the MS 28 in PLMN 30 may suitably be replaced by a network node either located in the fixed PSTN/ISDN network 16 or in the same PLMN 30. Thus such capability negotiation may take place between mobile stations in the same mobile network.

## 5 SECOND EMBODIMENT

In accordance with a second embodiment of the present invention, using the telecommunication system of Figure 1, there is shown a network element, hereinafter referred to as an originating mobile station 4 located in a first PLMN 2 which mobile station 4 is controlled by Base Station Controller or BSC 8. A  
 10 Mobile Switching Centre (MSC) 10 directly controls or is linked to the BSC 8 and has an associated storage means in the form of a VLR 12. A GMSC 14 provides an interface between other networks such as a PSTN or ISDN 16. The GMSC 14 is directly linked to the MSC 10 and a further MSC 20 which has an associated VLR 22. Each of the VLRs store details of mobile subscribers and their mobile  
 15 units that are temporarily located within the serving area of the associated MSC. A further storage means 18 in the form of a Home Location Register (HLR) provides permanent storage of subscriber details and keeps continuous track of the location of a subscriber whether that subscriber is in an MSC service area or in a different PLMN. This information is used by the GMSC 14 when receiving a  
 20 call from another network.

When the mobile station 4 wishes to initiate a communication or a call with a mobile station, hereinafter referred to as a destination mobile station, MS 28 located in a further PLMN 30, a list of operating capabilities of originating MS 4 is already stored in the VLR 12 associated with the MSC 10 serving MS 4. The  
 25 destination mobile station MS 28 is serviced by base station controller BSC 27 which in turn is linked to and controlled by MSC 29. Associated with the MSC 29 is a storage means in the form of a VLR 31 which stores a list of operating capabilities of MS 28. The MSC 29 is linked directly to a GMSC 32 which in turn is linked to a further network such as the PSTN/ISDN 16. A set-up message is  
 30 transmitted from MS 4 to the MSC 10. Thereafter an Initial Address Message (IAM) is sent from the MSC 10 to the GMSC 32 which may traverse other nodes such as the GMSC 14 and the fixed network 16. Included in this message are the

operating capabilities, including, for example, the list of codecs that the MS 4 can use. At this stage on receipt by the GMSC 32 of the IAM from MSC 10, the GMSC 32 will send an information retrieval message in the form of a routing information retrieval signal to the MSC 29/VLR 31 requesting identification of the destination mobile station by the MSISDN or IMSI, in which case the MSC 29/VLR 31 will respond by sending the Mobile Subscriber Roaming Number (MSRN). This is sent back to the GMSC 32 for call routing purposes and a list of supported operating capabilities of the MS 28 is returned to the GMSC 32. The GMSC 32 is then in a position to select a codec or other operating capabilities for use and compatibility between the originating MS 4 and the destination MS 28. A further Initial Address Message or (IAM) is sent from the GMSC 32 to the MSC 29 including the selected codec whereupon a call is set up between the destination MS 28 and the originating MS 4. The list of supported operating capabilities, including codecs, by MS 28 is initially obtained from the VLR 31 for use in the return routing information retrieval message from the MSC 29 to the GMSC 32.

The MSC 10 or equivalently a BICC node has capability to separate an ISDN user part (ISUP) signal into a Call Control (CC) portion and a Bearer Control (BC) portion to where the Call Control (CC) portion of the ISUP carries the initial address message IAM. By separating out the CC and BC portions via ISUP, the BC portion can allow the transmission at non-PCM levels particularly across the fixed network 16 which generally operates at 64 kbit/s. For example, channels only require 8 kbit/s or 16 kbit/s can be used so that when the MS 4 communicates with the MS 28, the selected codec may reflect the transmission at non-PCM levels such as 13 kbit/s for example.

Referring to Figure 3, MS 4 in the originating PLMN 2 sets up the call through the set-up signal 34 which is received by the MSC 10. From there the MSC 10 sends an IAM 36 with a list of the operating capabilities of the MS 4, which may for example contain a list of codecs X, Y, Z that the MS 4 may use. This is transmitted to the GMSC 32, which by way of example is transmitted over a core network 16. The GMSC 32 then sends the routing information retrieval message 38 to the MSC 29/VLR 31 and when that signal is received a signal is returned to the GMSC 32 including the list of supported codecs and other

operating capabilities of MS 28. In this particular example these supported codecs are identified as X, Y and W. The GMSC 32 then selects an appropriate codec, in this example X, for use by both MS 4 and MS 28 and forwards an IAM 44 to the MSC 29 including the listed codec X and from there a set-up signal 42 is transmitted from the MSC 29 to the MS 28. At the same time the retrieval message 38 is being sent to the MSC 29, a call processing signal 46 is sent from the MSC 10 to the MS 4 so as to inform the MS 4 of progress of the call. A message 48, in the form of an application transport message (APM), containing the selected codec X is transmitted from GMSC 32 to the MSC 10 which in turn transmits a further progress call 50 to the MS 4 containing the selected codec X in this case. Radio Access Bearer (RAB) channels are then set up between the mobile stations and their respective MSCs at steps 52 and 54 respectively. An alert signal 56 is then sent from the destination MS 28 to the originating MS 4 as an in-band tone. On receipt of the alert message, the MS 4 responds by generating a ringing tone and if the subscriber of mobile station 28 answers, that MS sends a connect message at 58 to the MSC 29. The connection is then acknowledged by the MSC 29 in a return signal 60 to the MS 28 and then the MSC 29 forwards an answer message 62 to the GMSC 32 which is then forwarded at 64 on to the MSC 10. A connect message 66 is then transmitted from the MSC 10 to the MS unit 4 and connection is acknowledged by the MS 4 in a signal 68 back to the MSC 10. Thereafter conversation can then take place between the two mobile subscribers.

With reference to Figure 4 the routing information retrieval message is sent by the GMSC 32 to the Home Location Register (HLR) 33 as a signal 70. This signal is sent using the Mobile Application Part (MAP) protocol and contains information requesting the identity of the mobile subscriber 28, such as the MSISDN or IMSI, from the HLR 33. The HLR 33 then forwards on a signal 72 using MAP to the visited network, in this case MSC 29 and VLR 31 of the MS 28. The signal 72 includes the request for the MS 28 to provide a roaming number or IMSI (International Mobile Subscriber Identity). Once received by the MSC 29 it responds with a signal 74 containing an acknowledgement of the signal 72 and transmits the mobile subscriber roaming number applicable to the MS 28 together



with a list of operating capabilities, including a list of codecs, to be used by the MS 28. This list is retrieved from the VLR 31. That gets transmitted to the HLR 33 which in turn forwards a signal 76 to the GMSC 32 containing the routing information acknowledgement and the MSRN and the list of operating capabilities  
 5 of the mobile station 28.

It will be appreciated that the list of operating capabilities included in the IAM 36 may be incorporated in the MAP message 70 sent from the GMSC 32 to the HLR 33, and then in the MAP message 72 from the HLR 33 to the MSC 29/VLR 31. The selected operating capability may then be returned to the  
 10 GMSC 32 from the MSC 29/VLR 31 via MAP messages 74 and 76. In this case, codec selection takes place in the MSC 29/VLR 31.

Although this particular embodiment has been described with respect to a GSM network, the invention equally applies to third generation PLMN networks and other second generation PLMN networks, having similar architectures.  
 15 Furthermore the telecommunications network node in this preferred embodiment has been identified as GMSC 32. It may equally be a further GMSC in the network identified as the home network of the destination mobile station MS 28. Alternatively it may be any other node in either a PLMN or a node located in the fixed network 16. Furthermore the call may not necessarily be established across  
 20 a fixed network 16 but may be from one mobile network to another mobile network or the originating mobile station and destination mobile station may be located within the same PLMN.

With the foregoing description in mind, it is to be appreciated that the speed and efficiency at which operating capabilities, such as codecs and security  
 25 algorithms, may be substantially accelerated from mobile terminated calls where a list of operating capabilities of the mobile station are stored at a selected telecommunications node such that the requirement for negotiating operating capabilities out of band towards the terminating mobile station is substantially reduced or not needed at all. Furthermore the GMSC serving the originating  
 30 mobile station may have forwarded to it a list of operating capabilities of the originating mobile station or network element which is sent from the designated VLR associated with the originating mobile station or network element.



**WE CLAIM:**

1. A method of communicating in a telecommunication system including at least one mobile station, the method including the step of:

providing operating capabilities of the mobile station at a node associated with the mobile station wherein the node is upstream in a communication path from the mobile station.

2. A method as claimed in claim 1, wherein the step of providing includes: transmitting a list of operating capabilities from the mobile station to the node via a message.

3. A method as claimed in claim 2, wherein the message is a location update message.

4. A method as claimed in claim 1, wherein the step of providing includes storing the operating capabilities at the node.

5. A method as claimed in claim 1, further including the step of:  
negotiating operating capabilities between the mobile station and a telecommunication element.

6. A method as claimed in claim 5, wherein the step of negotiating includes:  
comparing the operating capabilities stored at the node associated with the mobile station with operating capabilities stored at a node associated with the telecommunication element.

7. A method as claimed in claim 6, wherein the step of negotiating further includes:

selecting operating capabilities based on operating capabilities that are stored in common by both nodes.

8. A method as claimed in claim 1, wherein the operating capabilities include codecs.
9. A method as claimed in claim 1, wherein the operating capabilities include security algorithms.
10. A method as claimed in claim 5, wherein the telecommunication element is any one of a mobile station, a terminal device or a node.
11. A method as claimed in claim 1, wherein the node associated with the mobile station is any one of a MSC, a VLR, a HLR or a GMSC.
12. A method as claimed in claim 5, wherein the node associated with the telecommunication element is a MSC, a VLR, a HLR or a GMSC.
13. A method of negotiating operating capabilities between a mobile station in a mobile telecommunications network and a network node, wherein said mobile telecommunications network includes a storage means associated with a switching centre serving said mobile station;  
the method including the step of:  
transmitting a list of one or more operating capabilities from said mobile station to the switching centre for storage in said storage means as part of a non-call based signal.
14. A method of providing operating capabilities of a mobile station at a telecommunications network node to a telecommunications element during a call set-up procedure between the mobile station and said telecommunications element, and wherein said telecommunications element transmits to the telecommunications network node a list of operating capabilities of the telecommunications element as part of the call set-up procedure, the method including the steps of:

transmitting a list of operating capabilities of said mobile station from a switching centre serving said mobile station to said telecommunication network node;

providing said list of operating capabilities at said telecommunications network node;

such that on initiation of a communication from said network element to said mobile station, said telecommunications network node internally selects one or more operating capabilities common to both the mobile station and the network element.

15. A telecommunication system including at least one mobile station and at least one node associated with the mobile station, the node including means for providing operating capabilities of the mobile station wherein the node is upstream in a communication path from the mobile station.

16. A system as claimed in claim 15, wherein the mobile station transmits a list of operating capabilities to the node via a message.

17. A system as claimed in claim 16, wherein the message is a non-call based message

18. A system as claimed in claim 17, wherein the message is a location update message.

19. A system as claimed in claim 15, wherein the node includes storage means for storing the operating capabilities.

20. A system as claimed in claim 16, wherein the node includes storage means for storing the operating capabilities.

21. A system as claimed in claim 17, wherein the node includes storage means for storing the operating capabilities.

22. A system as claimed in claim 18, wherein the node includes storage means for storing the operating capabilities.

23. A system as claimed in claim 15, further including a telecommunication element and a node associated with the element wherein the mobile station and the element negotiate operating capabilities based on operating capabilities stored at respective nodes.

24. A system as claimed in claim 16, further including a telecommunication element and a node associated with the element wherein the mobile station and the element negotiate operating capabilities based on operating capabilities stored at respective nodes.

25. A system as claimed in claim 17, further including a telecommunication element and a node associated with the element wherein the mobile station and the element negotiate operating capabilities based on operating capabilities stored at respective nodes.

26. A system as claimed in claim 18, further including a telecommunication element and a node associated with the element wherein the mobile station and the element negotiate operating capabilities based on operating capabilities stored at respective nodes.

27. A system as claimed in claim 23 or 24, wherein the operating capabilities include codecs.

28. A system as claimed in claim 25 or 26, wherein the operating capabilities include codecs.


29. A system as claimed in claim 23 or 24, wherein the operating capabilities include security algorithms.
30. A system as claimed in claim 25 or 26, wherein the operating capabilities include security algorithms.
31. A system as claimed in claim 23 or 24 wherein the telecommunication element is any one of a mobile station, a terminal device or a node.
32. A system as claimed in claim 25 or 26, wherein the telecommunication element is any one of a mobile station, a terminal device or a node.
33. A system as claimed in claim 13 or 14, wherein the node associated with the mobile station is any one of a MSC, a VLR, a HLR or a GMSC.
34. A system as claimed in claim 15, wherein the node associated with the mobile station is any one of a MSC, a VLR, a HLR or a GMSC.
35. A system as claimed in claim 23 or 24, wherein the node associated with the telecommunications element is any one of a MSC, a VLR, a HLR or a GMSC.
36. A system as claimed in claim 25 or 26, wherein the node associated with the telecommunications element is any one of a MSC, a VLR, a HLR or a GMSC.


**ABSTRACT**

The present invention relates to a system and method of communicating operating capabilities in a telecommunication network or networks. The present invention stems from the realisation that mobile telecommunication network resources can be utilised with greater efficiency by maintaining mobile station attributes or operating capabilities at a network node associated with the mobile station. Preferably, the network node is a Visitor Location Register VLR. Additionally, the network node may be a Home Location Register HLR, a Mobile Switching Centre MSC or a Gateway Mobile Switching Centre GMSC. In particular, the invention may provide the creation of a list of operating capabilities at a network node upstream from the mobile station. Having done this, a comparison of this list with another list received from a remote telecommunication element to negotiate operating capabilities at a call set up is achieved without involving communication resources between the mobile station and the network node.

RCS/MBP/SH



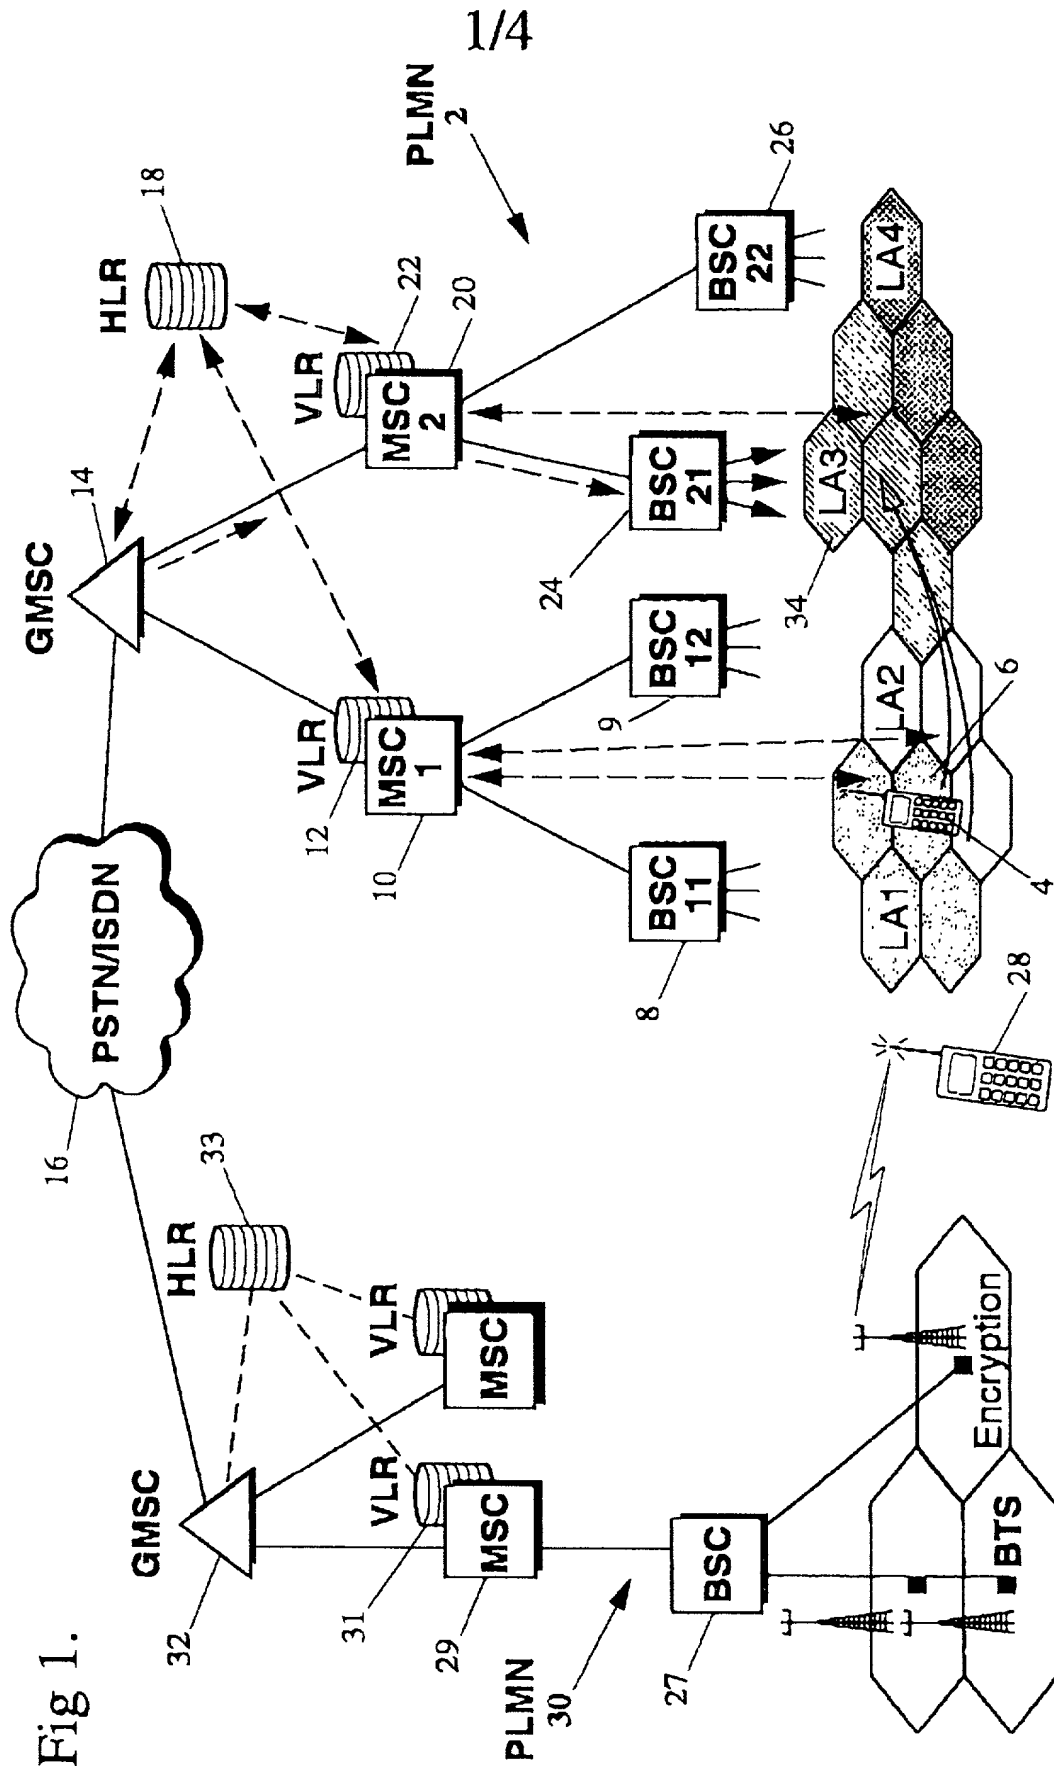

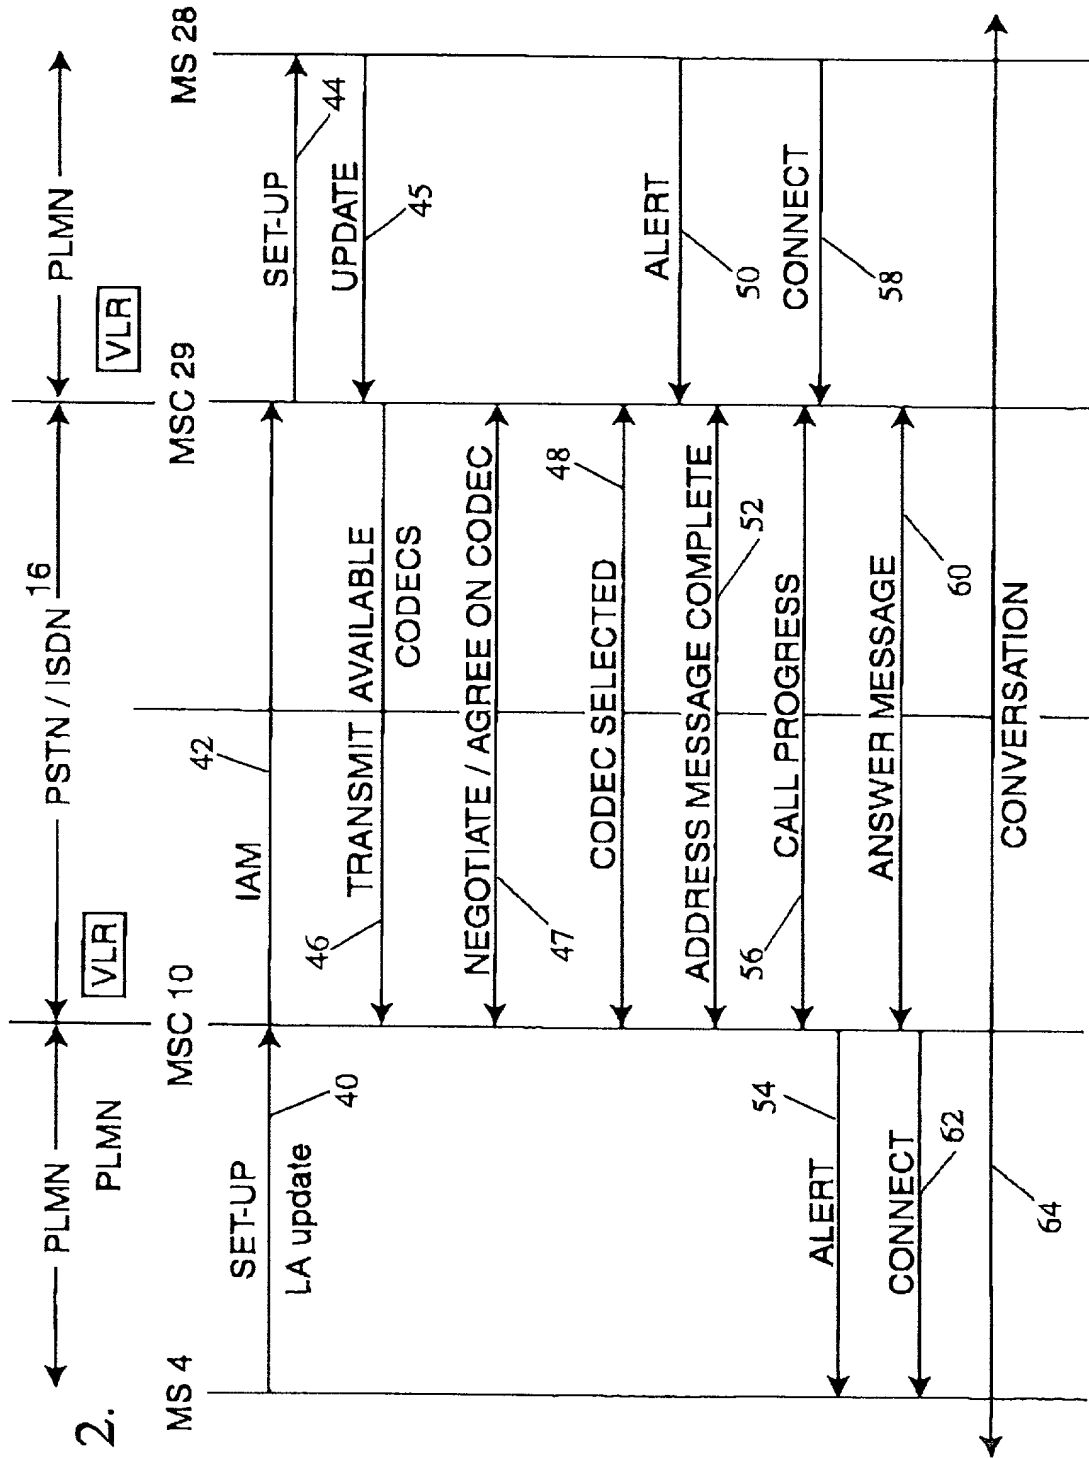

Fi 30


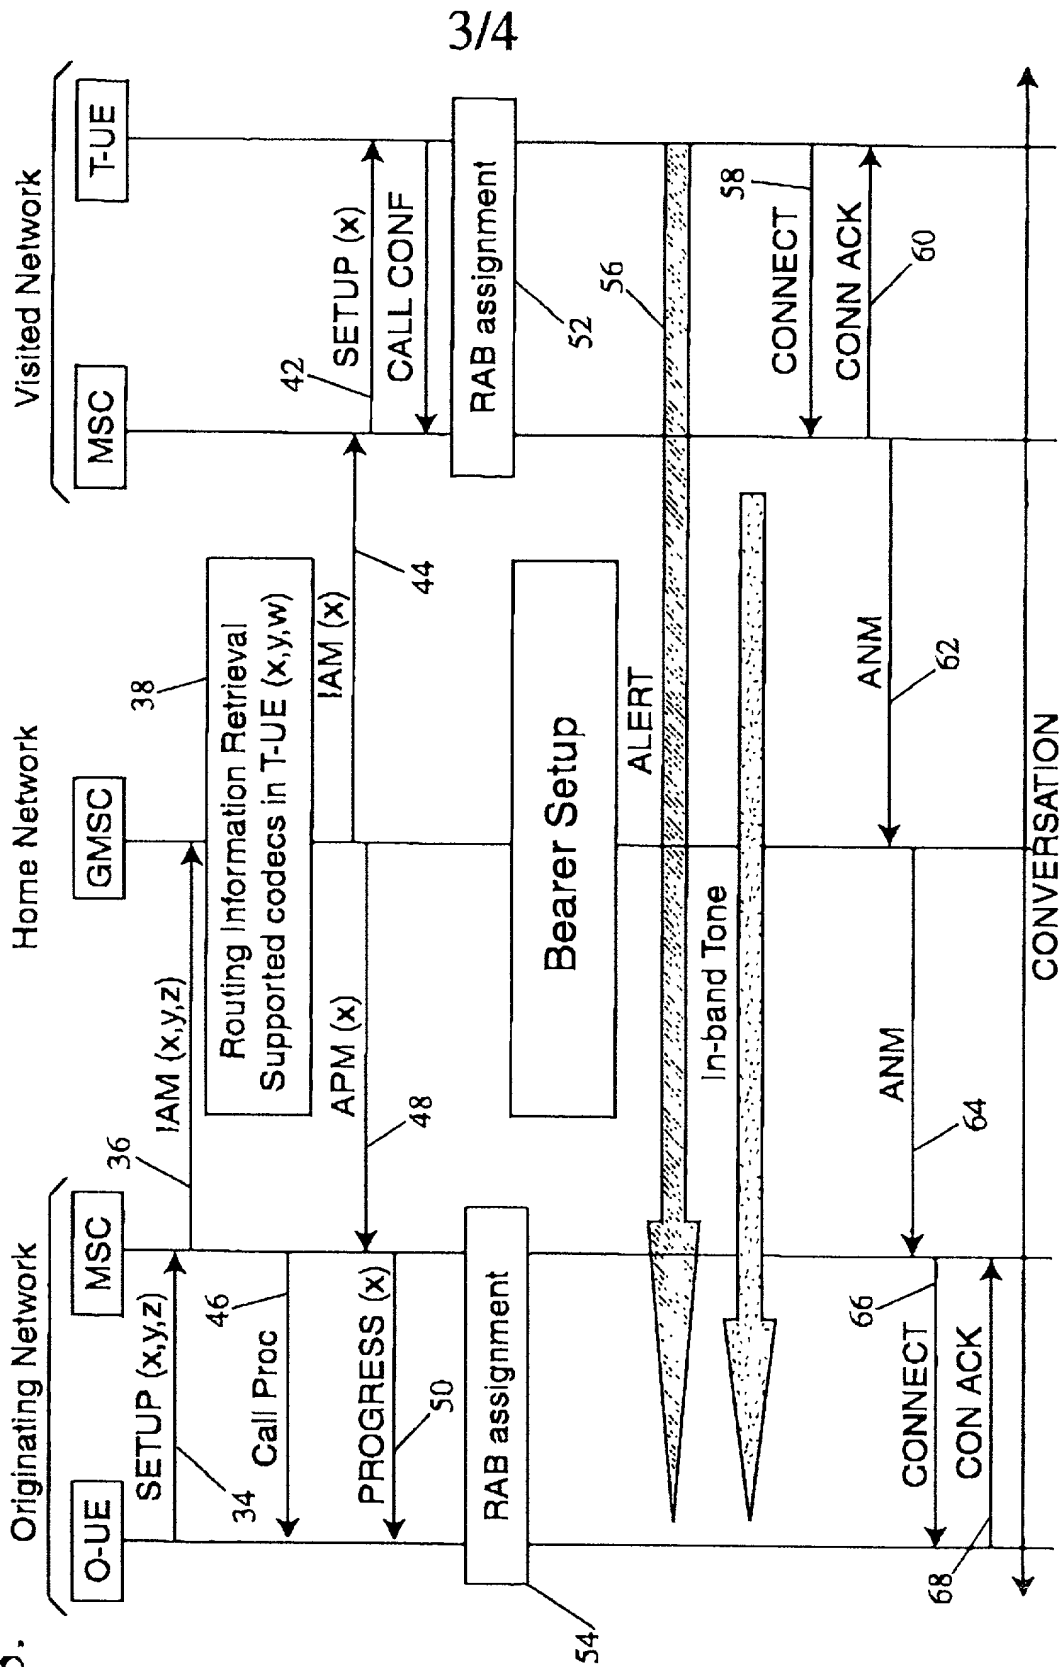


FIG. 4 is a sequence diagram illustrating a process for providing routing information to a visited network. The diagram involves two main entities: the Home Network and the Visited Network. The Home Network contains a GMSC (Gateway Mobile Station Controller) and an HLR (Home Location Register). The Visited Network contains an MSC/VLR (Mobile Station Controller/Visitor Location Register). The process begins with the GMSC sending a MAP\_Send\_Routing\_Info (MSISDN,...) message to the HLR (70). The HLR then sends a MAP\_Provide\_Roaming\_Number (IMSI, etc) message to the MSC/VLR (72). The MSC/VLR responds with a MAP\_Provide\_Roaming\_Number Ack (MSRN, codec list,...) message (74). Finally, the GMSC sends a MAP\_Send\_Routing\_Info Ack (MSRN, codec list,...) message (76).

Fig 4.

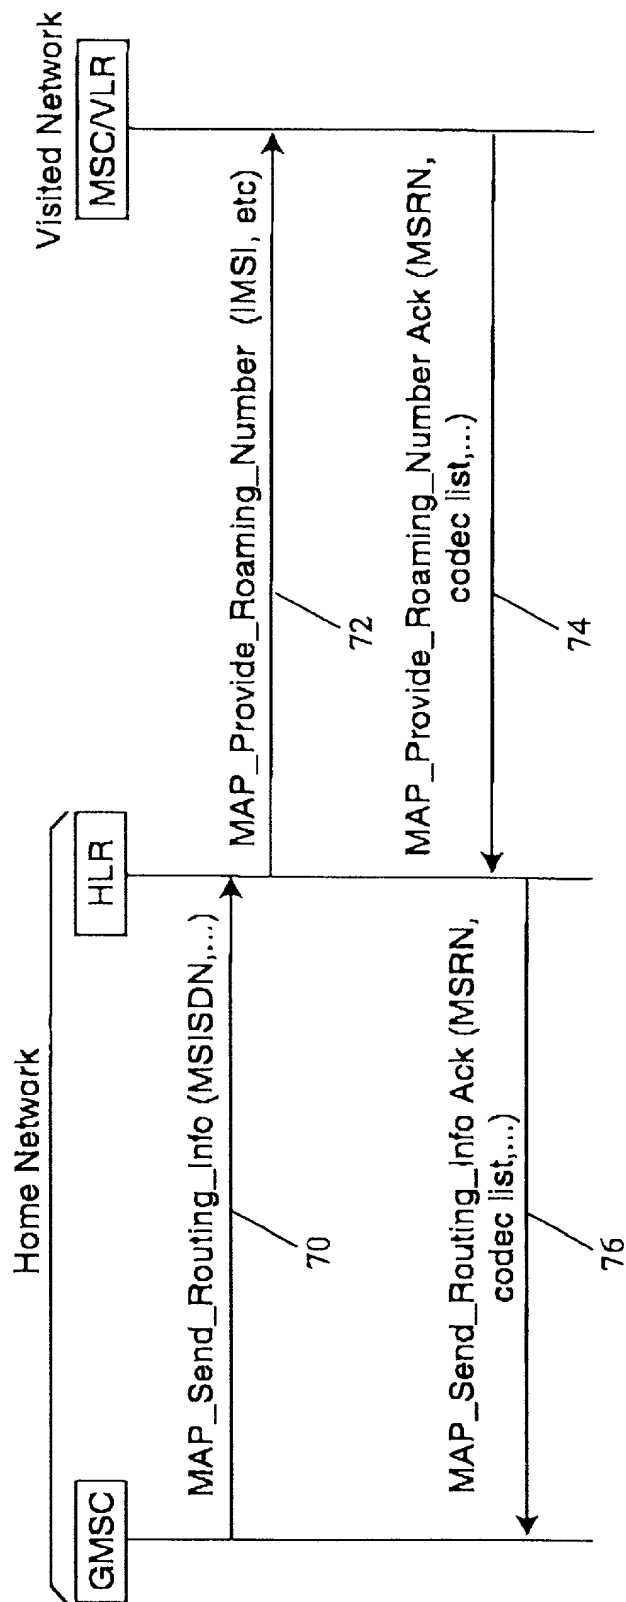

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)**  
**DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **A SYSTEM AND METHOD OF COMMUNICATING OPERATING CAPABILITIES IN A TELECOMMUNICATION NETWORK**, the specification of which: (mark only one)

- ☒ (a) is attached hereto.
- ☐ (b) was filed on 21 July 2000 as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)
- ☐ (c) was filed as PCT International Application No. PCT/\_\_\_\_\_ on \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).
- ☐ (d) was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was issued a Notice of Allowance on \_\_\_\_\_.
- ☐ (e) was filed on 21 July 2000 and bearing attorney docket number 27795-00018.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and

having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year Filed</u>	<u>Date first laid- open or Published</u>	<u>Date patented or Granted</u>	<u>Priority Claimed</u>	
					<u>Yes</u>	<u>No</u>
PQ1783	Australia	22 July 1999			X	
PQ1942	Australia	30 July 1999			X	

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

Application No. (series code/serial no.)      Month/Day/Year Filed      Status(pending, abandoned, patented)

**NONE**

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493	RUSSELL J. GENET, Reg. No. 42,571	DANIEL G. NGUYEN, Reg. No. 42,933
THOMAS E. ANDERSON, Reg. No. 37,063	J. KEVIN GRAY, Reg. No. 37,141	SPENCER C. PATTERSON, Reg. No. 43,849
BENJAMIN J. BAI, Reg. No. 43,481	STEVEN R. GREENFIELD, Reg. No. 38,166	RUSSELL N. RIPPAMONTI, Reg. No. 39,521
MICHAEL J. BLANKSTEIN, Reg. No. 37,097	J. PAT HEPTIG, Reg. No. 40,643	STEPHEN G. RUDISILL, Reg. No. 20,087
MARY JO BOLDINGH, Reg. No. 34,713	SHARON A. ISRAEL, Reg. No. 41,867	HOLLY L. RUDNICK, Reg. No. 43,065
MARGARET A. BOULWARE, Reg. No. 28,708	JOHN R. KIRK JR., Reg. No. 24,477	J.L. JENNIE SALAZAR, Reg. No. 45,065
ARTHUR J. BRADY, Reg. No. 42,356	PAUL R. KITCH, Reg. No. 38,206	KEITH W. SAUNDERS, Reg. No. 41,462
MATTHEW O. BRADY, Reg. No. 44,554	TIMOTHY M. KOWALSKI, Reg. No. 44,192	JERRY R. SELINGER, Reg. No. 26,582
DANIEL J. BURNHAM, Reg. No. 39,618	HSIN-WEI LUANG, Reg. No. 44,213	GARY B. SOLOMON, Reg. No. 44,347
THOMAS L. CANTRELL, Reg. No. 20,849	JAMES F. LEA III, Reg. No. 41,143	WAYNE O. STACY, Reg. No. 45,125
RONALD B. COOLLEY, Reg. No. 27,187	ROBERT W. MASON, Reg. No. 42,848	STEVE Z. SZCZEPANSKI, Reg. No. 27,957
THOMAS L. CRISMAN, Reg. No. 24,846	ROGER L. MAXWELL, Reg. No. 31,855	ANDRE M. SZUWALSKI, Reg. No. 35,701
STUART D. DWORK, Reg. No. 31,103	ROBERT A. McFALL, Reg. No. 28,968	ALAN R. THIELE, Reg. No. 30,694
WILLIAM F. ESSER, Reg. No. 38,053	STEVEN T. McDONALD, Reg. No. 45,999	TAMSEN VALOIR, Reg. No. 41,417
ROGER J. FRENCH, Reg. No. 27,786	LISA H. MEYERHOFF, Reg. No. 36,869	RAYMOND VAN DYKE, Reg. No. 34,746
JANET M. GARETTO, Reg. No. 42,568	STANLEY R. MOORE, Reg. No. 26,958	BRIAN D. WALKER, Reg. No. 37,751
JOHN C. GATZ, Reg. No. 41,774	RICHARD J. MOURA, Reg. No. 34,883	GERALD T. WELCH, Reg. No. 30,332
	MARK V. MULLER, Reg. No. 37,509	HAROLD N. WELLS, Reg. No. 26,044
	P. WESTON MUSSELMAN JR. Reg. No. 31,644	WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, a Professional Corporation**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the

person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Stanley R. Moore, Esq.  
Jenkins & Gilchrist, P.C.  
1445 Ross Avenue, Suite 3200  
Dallas, Texas 75202-2799  
214/855-4500  
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Leslie Gary GRAF		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	3 Hender Court Balwyn, Victoria 3103, Australia		Australian
	<b>Residence</b> (city, state, country)		<b>Citizenship</b>
	3 Hender Court Balwyn, Victoria 3103, Australia		
	<b>Post Office Address</b> (include zip code)		

(FOR ADDITIONAL INVENTORS, check here X and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)

2	Christian Norman GROVES		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	21 Garden Avenue Keilor, Victoria 3036, Australia <b>Residence</b> (city, state, country) <div style="text-align: right;">Australian <b>Citizenship</b></div>		
	21 Garden Avenue Keilor, Victoria 3036, Australia <b>Post Office Address</b> (include zip code)		

3	Mark Alan HOLLIS		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	1 Daintree Avenue Park Orchards, Victoria 3114, Australia <b>Residence</b> (city, state, country) <div style="text-align: right;">Australian <b>Citizenship</b></div>		
	1 Daintree Avenue Park Orchards, Victoria 3114, Australia <b>Post Office Address</b> (include zip code)		

4	Juan NOGUERA-RODRIGUEZ		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	348 Deakin Street Essendon, Victoria 3040, Australia <b>Residence</b> (city, state, country) <div style="text-align: right;">Australian <b>Citizenship</b></div>		
	348 Deakin Street Essendon, Victoria 3040, Australia <b>Post Office Address</b> (include zip code)		



5	Stephen Christopher TERRILL		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	Hamacker, Flemingatan 45 4 tr. Stockholm 112 32 SWEDEN		
	<b>Residence</b> (city, state, country)	Swedish <b>Citizenship</b>	
	Hamacker, Flemingatan 45 4 tr. Stockholm 112 32 SWEDEN <b>Post Office Address</b> (include zip code)		

6	Ian RYTINA		
	<b>Full Name</b>	<b>Inventor's Signature</b>	<b>Date</b>
	30/25 Barkley Street Carlton, Victoria 3053, Australia		
	<b>Residence</b> (city, state, country)	Australian <b>Citizenship</b>	
	30/25 Barkley Street Carlton, Victoria 3053, Australia <b>Post Office Address</b> (include zip code)		